

alrouf
LIGHTING TECHNOLOGY CO.Ltd.





شركة الروف
لتقنية الإنارة المحدودة

An iso 9001-2015
Certified company



ALROUF ICON SERIES STREET LIGHT

www.alroufled.com

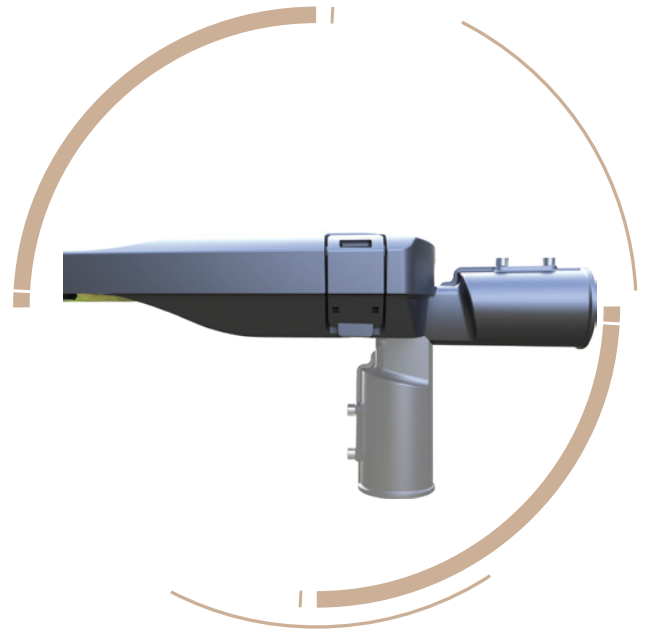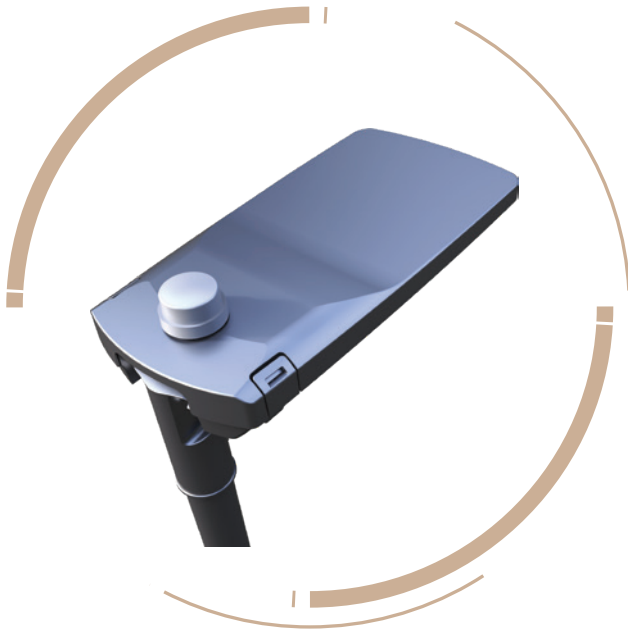

Performance

Philips Lumileds	IP66
10W~200W	IK08
4500~5500K (2500~6500K Optional)	80x150° / 85x155° / 90x150° / 100x150°
≥70	Operating Temperature:-45°C to +45°C (-49°F to 113°F)
L70>100,000hours	Storing Temperature:-45°C to +80°C (-49°F to 176°F)
AC 100~277V	132lm/W~145lm/W
0.95 min	3G Vibration
	Inventronics / Sosen

Certification



Time to Change

Icon is a perfect lighting solution for municipalities looking for a fast return on investment. As a true point-to-point replacement solution for conventional light sources, the compact luminaire, with elegant finless design, is eco-friendly and easy to install with its tool-free access to gear tray and tool-free replacement of the component in the gear compartment.

Icon is available with a number of different optics and lumen packages that can even be tuned further to fit exact project requirements. Its universal spigot is adapted to both posttop and side-entry mounting.

With future-ready socket and could be paired with any control system, Icon could achieve up to 75% of energy savings compared to conventional lamp systems.



Product Features

- System Light efficacy 140 LPW.
- Rugged one-piece die cast housing with corrosive resistant polyester powder coat finish body.
- Multiple choices of optical lenses for true type and type street lighting pattern.
- Tool free access for easy installation, direct slide-in mount.
- IP66 water and dust proof.
- 3G Vibration & IK08 impact resistance.
- 5-10 Years Warranty.





Typical model specification



Part #	Power	LEDs Qty	Lens Qty	Out Current (Each Chis)	Efficacy (IES)	Total Lumens	N.W	Product Dimension
ALROUF-STL	10W	24	2	63mA	145lm/w	1450lm	4.0kg/8.8lbs	577x233x103mm 22.7x9.2x4.1in
	20W	32	2	95mA	140lm/w	2800lm		
	30W	48	4	95mA	140lm/w	4200lm		
	40W	60	4	102mA	140lm/w	5600lm		
	50W	60	4	125mA	135lm/w	6750lm		
ALROUF-STL	60W	72	6	125mA	137lm/w	8220lm	4.0kg/8.8lbs	627x272x103mm 24.7x10.7x4.1in
	70W	96	6	112mA	143lm/w	10010lm		
	80W	96	6	126mA	140lm/w	11200lm	5.0kg11.0lbs	
	90W	96	6	145mA	137lm/w	12330lm		
	100W	96	6	155mA	135lm/w	13500lm		
ALROUF-STL	110W	112	7	152mA	132lm/w	14520lm	5.0kg11.0lbs	627x272x103mm 24.7x10.7x4.1in
	120W	144	9	130mA	142lm/w	17040lm		
	130W	144	9	140mA	139lm/w	18070lm		
	140W	144	9	150mA	137lm/w	19180lm		
	150W	144	9	155mA	135lm/w	20250lm		
ALROUF-STL	160W	192	12	130mA	137lm/w	21920lm	6.0kg13.2lbs	767x300x103mm 30.2x11.8x4.1in
	170W	240	16	112mA	140lm/w	23800lm	6.5kg14.3lbs	
	180W	240	16	120mA	138lm/w	24840lm		
	200W	240	16	130mA	135lm/w	27000lm		

Photometrics



80x150(Type II -S)

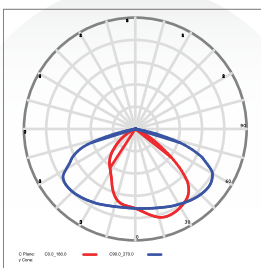



85x155(Type II -S)

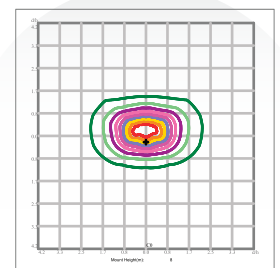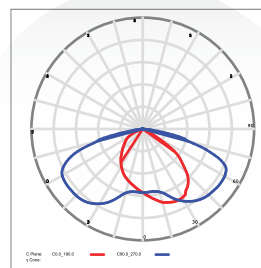

90x150(Type III -S)

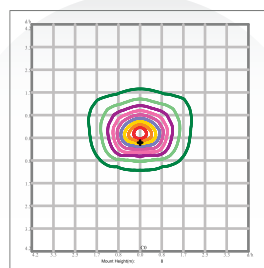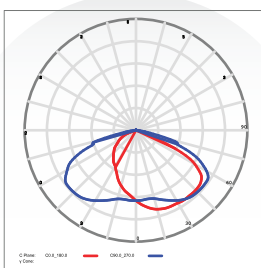


100x150(Type III -S)

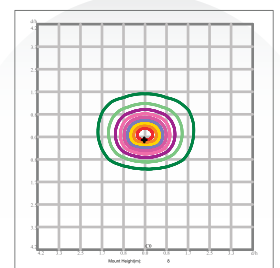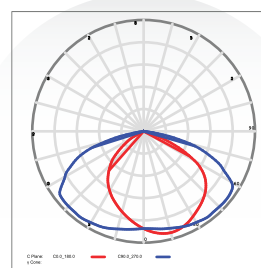

Electrics

Future Ready NEMA/Zhaga Connection

Ready NEMA or Zhaga socket to enable further control of streetlight from simple photocell to smart city controller node.

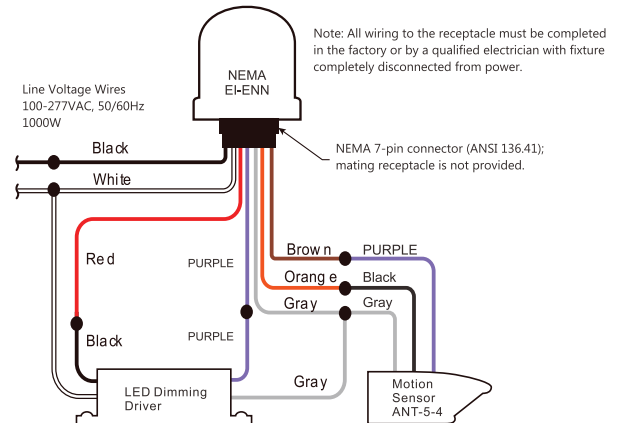

Tool-free Access

In order to avoid the inconvenience and safety hazards of multi-tool operation, Icon series street light is designed with tool free access to facilitate high-altitude installation and maintenance by maintenance personnel.



Installation

For high performance and long term reliability, the light should be installed in free air.

Slip Fitter Mount

1. Unlock the screws, adjust the angle of slip fitter.
2. Feed the power cord through the pole and make wiring.
3. Slide the fixture onto the pole, lock the screws.



LED



Alrouf
LIGHTING TECHNOLOGY CO.Ltd.



شركة الروف
لتقنية الإنارة المحدودة

Dammam

Prince Metib st, Izdhar District
Alrouf Trading Building
Tel/Fax : 966 13 8588556
sales@alroufled.com

Jeddah

Commercial center for
Dr. Hassan Nasr, Baladiyah St.,
Al Aziziyah.
Tel : +966-56 472 7973